



## SELECTFEED UNO

### Flatwork feeder for sheets and small pieces.

The VEGA Selectfeed Uno incorporates suction facility under the belts as well as a suction box.


The clipping station is in the centre of the machine.


The machine is fitted with a control box that incorporates 32 different spreading programmes including fault indicating and testing programmes.

After the spreading movement the upper part moves backwards and the sheet will be presented onto the belts.

To process small pieces the upperpart is put in the back position so that the beltbed will be free for feeding small pieces ergonomically.



	A	B
	3300	3360
	3000	3060

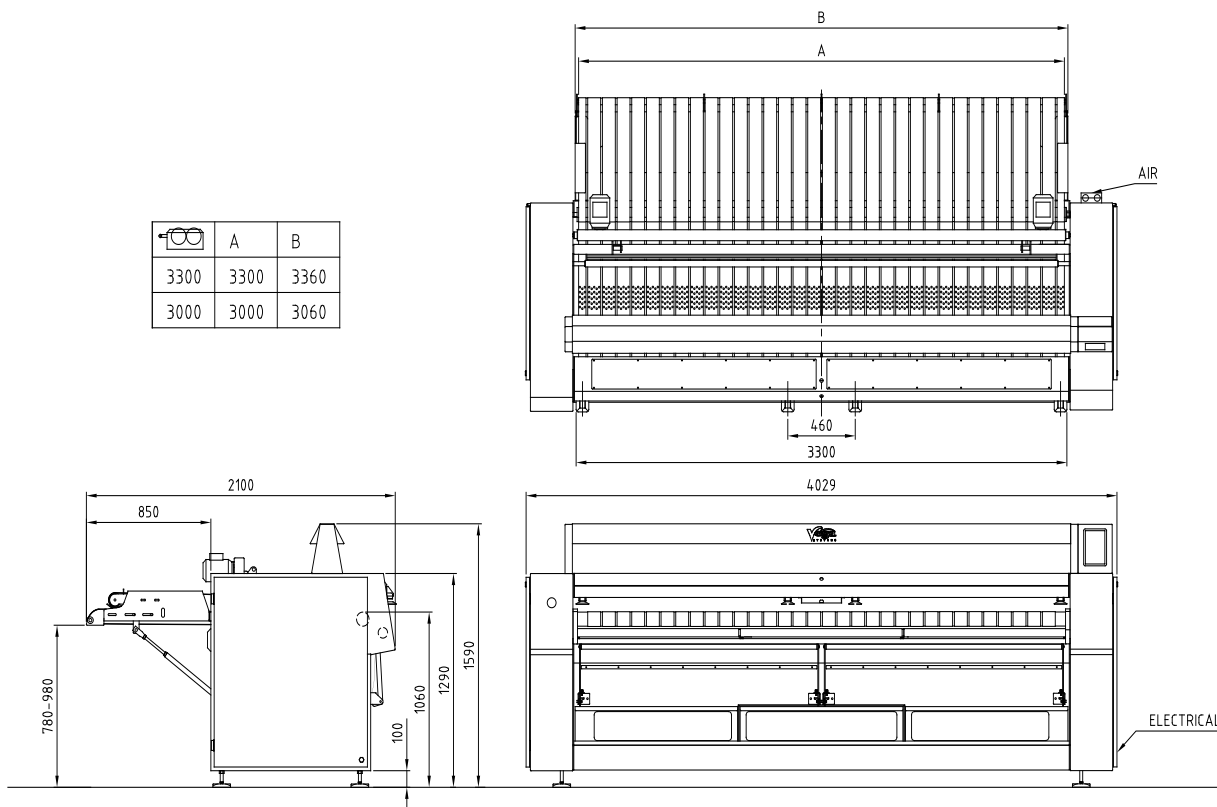

#### TECHNICAL SPECIFICATIONS:

- Electrical source : 3 x 380V + 0 + E, 50 Hz.
- Electrical consumption : 5,2 kW, 25 Amp.
- Pneumatic connection :  $\varnothing$  8 mm, 7 bar.
- Pneumatic consumption : 12 litres/piece

#### OPTIONAL:

- Two-lane execution model Selectfeed Duo.
- Automatic speed synchronisation with the speed of the ironer.
- Direct feeding onto the first chest of the ironer.
- Stretching conveyor on the feeding nose.
- Access bridge and stairs.
- Castor and rails.

#### INSTALLATION AND SERVICE:

Please contact VEGA-systems for more detailed lay-outs and technical data required for installation and service.



**VEGA-systems B.V.**  
 Lauwersmeer 9  
 5347 JR Oss, The Netherlands  
 Phone +31(0)412 407090  
 Fax +31(0)412 407091  
 info@vegasystems.nl  
 www.vegasystems.nl