



IY180 | IY240 | IY280

# Softmount Washer-Extractor

## FEATURES

- Stainless steel top, drum and tub and anthracite front and side panel
- Patented soap hopper
- Easy access to all vital parts from the front
- Large door opening for easy loading & unloading
- Smart Drum : Extra mechanical action thanks to the cascading shape of the surface
- Smart Wave: Optimized water and detergent consumption
- Large drain valve (Ø 76 mm)

## OPTIONS

- Coin operated pumps
- Stainless steel cabinet
- Liquid soap connection and
- Water recovery kit
- Steam heating version
- 3rd water inlet
- Weighing System

## CONTROLS OPTIONS

- Evolis / Evolis Elite – fully programmable and customizable cycles 7" touch screen.
- User-friendly screen with operating instructions built in as part of the control
- Complete control content available in 34 languages
- Aries / Aries Elite – fully programmable control with 20 Pre-set programs and memory up to 99.
- Aries Micro – Programmable control with 6 programs (+2 cycle modifiers and Imbalance detection)



### TOUCH CONTROL AVAILABLE

Multilingual user-friendly 7" touch control



### 500G EXTRACTION SPEED

Less moisture for a more efficient drying process




### CLOUD-BASED PLATFORM

to easily monitor your laundry everywhere and at any time

		IY180	IY240	IY280
<b>INNERDRUM</b>				
Capacity 1:09	kg (lb)	20 (44)	27 (60)	31 (68)
Capacity 1:10	kg (lb)	18 (40)	24 (53)	28 (62)
Volume	litres	180	240	280
Diameter	mm	750	750	750
<b>DRUM SPEED</b>				
Wash	rpm	42	42	42
Extraction	rpm	1047	1035	975
G-FACTOR		460	450	400
<b>HEATING</b>				
Electricity	kW	12 - 18	12 - 18	21,9
Steam	bar	1-8	1-8	1-8
Hot water	°C	90	90	90
Sound pressure level	dB (A)	< 65	< 65	< 65
Water valves connection	BSP	3/4"	3/4"	3/4"
Water pressure	kPa	100-800	100-800	100-800
Rec. water pressure	kPa	300-500	300-500	300-500
Water inlet	l/min	20	20	20-50
Drain valve	outer Ø mm	76	76	76
Flow amount with drain valve	l/min	210	210	210
Steam valve connection	BSP	1/2"	1/2"	1/2"
Steam pressure	kPa	100-800	100-800	100-800
<b>DIMENSIONS</b>				
Size H*W*D	mm	1430×970×970	1430×970×1105	1430×970×1185
Net weight	kg	380	430	495
<b>TRANSPORT DATA</b>				
Packed H*W*D	mm	1550×1025×1015	1550×1025×1150	1550×1025×1225
Gross weight	kg	395	450	515

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y								
<b>IY180</b>	806	758	970	24	477	1430	90	48	970	906	1320	1297.5	1215	490	108.5	270	203	-	67	1315	80	293	610	218	113								
<b>IY240</b>	806	758	970	24	477	1430	90	48	1105	1041	1320	1297.5	1215	490	108.5	270	203	-	67	1315	80	293	610	218	113								
<b>IY280</b>	806	758	970	24	477	1430	90	48	1185	1116	1320	1297.5	1215	490	108.5	270	203	274	67	1315	80	293	610	218	113								
	W			H			D																										

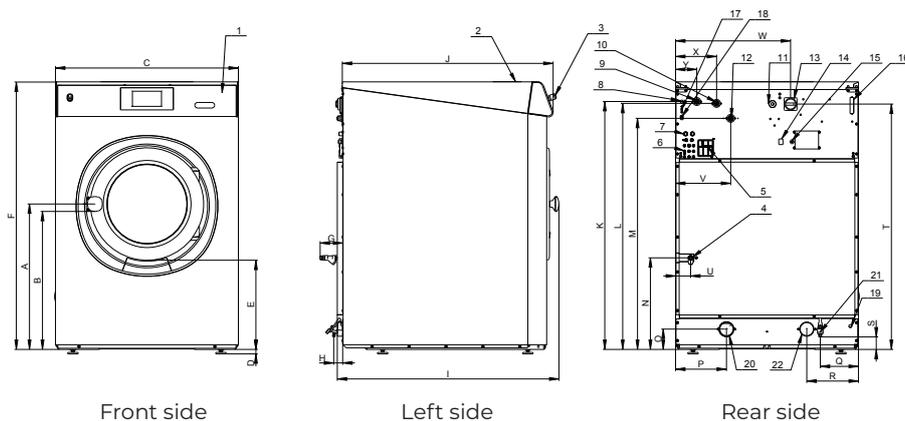

- |                                     |  |  |
|-------------------------------------|--|--|
| 1. Control panel                    | 9. Cold water inlet, soft                  | 16. Fuses  |
| 2. Soap dispenser                   | 10. Cold water inlet, hard                 | 17. USB port - optional  |
| 3. Central stop button              | 11. Electrical connection                  | 18. PC programming connection  |
| 4. Steam connection                 | 12. Hot water inlet                        | 19. Discharge water cable inlet  |
| 5. Air relieve                      | 13. Main switch                            | 20. Drain valve - 3 in. [76 mm]  |
| 6. Liquid soap connection           | 14. Heating change-over switch             | 21. Water Sample - 1/2 in. (Applicable for wash bath sample-on request only) |
| 7. Recycle water inlet              | 15. Liquid soap pump electrical connection |  |
| 8. Recycled water valve cable inlet |  |  |